



Data sheet

Power Supply with Accupack (DC-USV):LDR8024-LV-K

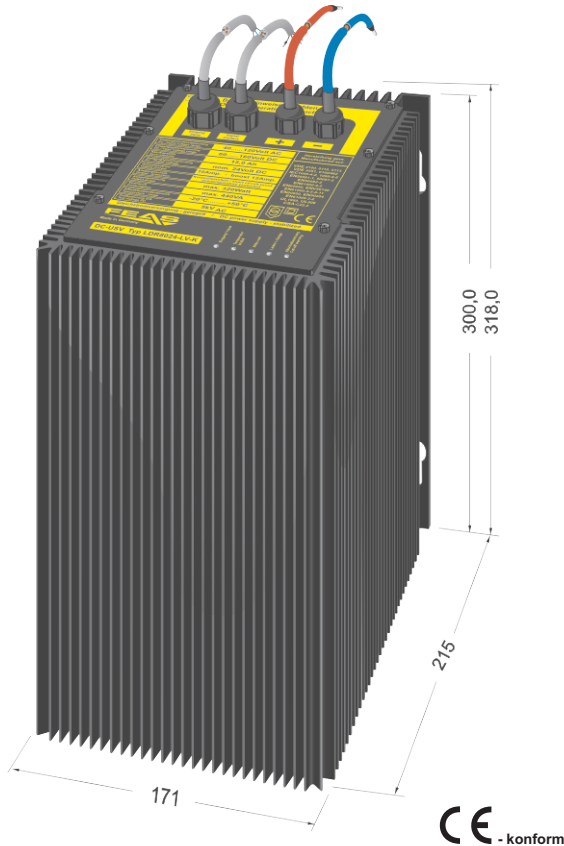

Discharge current diagramm at 20°C

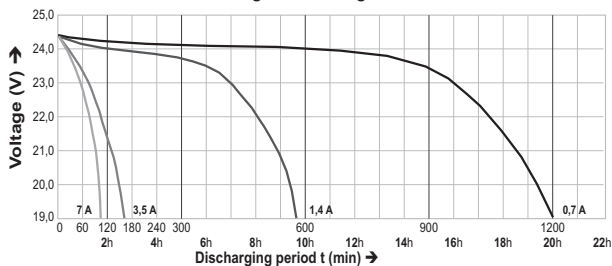

Products of the series:

Type	LDR8012-K	LDR8024-K	LDR8024-LV-K
Order number	589949	589948	589953
Input voltage	85 - 270 V _{AC} 120 - 400 V _{DC}	85 - 270 V _{AC} 120 - 400 V _{DC}	40 - 120 V _{AC} 60 - 160 V _{DC}
Output voltage	9.0 - 14.0 V _{DC}	19.0 - 28.0 V _{DC}	19.0 - 28.0 V _{DC}
Output current	15 A	10 A	10 A
Capacity (20°)	30 Ah	15 Ah	15 Ah
Nominal Power	210 W	280 W	280 W
Buffered time	100min typ. 15 A	80min typ. 10 A	80min typ. 10 A

Technical data

General data	
Type	LDR8024-LV-K
FEAS Order number	589953
Product description	Power Supply with accupack
Product function	DC power supply
Input data	
AC input voltage	40 - 120V _{AC} (0-66Hz)
DC input voltage	60 - 160V _{DC}
Input current at nominal load	at 115V _{AC} max. 2.2A
Input current peak	< 16 A at 115V _{AC}
Protective circuit	Transient voltage suppressor Varistor
Output data	
Output voltage U _{Nominal}	24 V _{DC}
Buffered voltage	19.0 - 28.0 V _{DC} following the accu-voltage
Output current I _{Nominal} / I _{Max}	10.0 / 12.0 A
Current limiting	appr. 30.0 A
Power P _{Nominal} / P _{Max}	280 / 320 Watt
Residual ripple (20MHz Bandwidth)	<25mV _{pp}
Control data	
Control deviation (Load)	<200 mV with load variation 10 90%
Control deviation (Supply)	<25 mV with load variation ±10%
Control time	<10ms with load variation 10 90%
Operating data	
Duty circle	100%
Efficiency	approx. 91% (grid mode)
Capacity C	15.0 Ah (20°C)
Buffered Time	typ. 10A - 80min (see graph on the left)
Parallel connection	No
Operating temperature range	-20°C to +50°C
Storage temperature range	-15°C to +40°C
Derating	from 40°C
Cooling	selfcooling recommended respective distance 15mm each
Installation altitude	unlimited
MTBF	> 380.000h (without accupack)
Safety devices	
Fuse for input	at 115V _{AC} 4.0A slow blow
Fuse for output	not necessary - short circuit proof
Overload protection	integrated into device
Safety data	
Test voltage transformer	5kV _{AC} according to VDE0570
High voltage resistance	Input/Output 4,4kV _{AC} according to VDE0806/IEC380
Degree of EMI suppresion	according to VDE0871B, EN55022/B
Protection class	Protection class I with PE-Connection (EN60950)
Extra low safety potential	PELV (EN60204), SELV (EN60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP54
Protective class terminals	-
Vibration proof	>30g at 33Hz in X, Y and Z acc. IEC68 and DIN41640
Status & Signal	
Status indicator	LED - Grid, Charging, Buffer mode, Temperature
Signals	Relais - Grid/Temp. , Accu-protection
Interfaces	Sleep-mode
Applied construction regulations	
according to VDE	VDE0100, VDE0110, VDE0113, VDE0551, VDE0806
IEC	IEC60950-1, IEC61000-6-1-2-3-4, IEC60068-2-3, IEC60068-2-11-52, IEC60529
EN	EN60950-1, EN61140, EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4, EN55022, EN55011, EN61000-3-2, EN61000-3-3, EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11, EN60068-1, EN6068-2-1, EN61558-2-17, EN61010-1
CSA/UL	CSA-C 22.2 / UL60950, UL508, UL1950
Mechanical data	
Mounting	on wall with screws M8
Dimensions (W x H x D)	171mm x 318mm x 215mm
Weight	approx. 21.0kg



Postfach 1521
D - 22905 Ahrensburg

Phone: +49 4102 42082
Fax: +49 4102 40930

E-Mail: sales@feas.com
Internet: www.feas.com